

WARRANTY

General

This product is warranted against defects in material and workmanship for a period of one (1) year from the date of shipment, not including vacuum tubes, which are warranted for ninety (90) days, or Weber speakers, which are covered by their manufacturer's warranty for thirty (30) days. If you believe any Curious Audio LLC product you have purchased has a defect in material or workmanship or has failed during normal use within the warranty period, please contact Curious Audio LLC at +1 828-708-7025 or info@curiousaudio.us for assistance. If product repair or replacement is necessary, the Customer will be solely responsible for all shipping charges, freight, insurance and proper packaging to prevent breakage in transit, whether or not the product is covered by this warranty. All shipments of repaired or replaced products by Curious Audio LLC will be F.O.B. at the Curious Audio LLC workshop in Newburgh, IN.

Limitations

This warranty does not apply to defects resulting from any Customer actions, such as mishandling, improper interfacing, operation outside of design limits, misapplication, improper repair, or unauthorized modification. No other warranties are expressed or implied. Curious Audio LLC specifically disclaims any implied warranties of merchantability or fitness for a specific purpose. Curious Audio LLC's liability shall be limited to the actual purchase price of any defective unit or units of equipment to which a claim is made, and shall in no event include the Customer's costs, lost profits or goodwill, or any other direct, indirect, special, incidental or consequential damages whether based on contract, tort or other legal theory. Curious Audio LLC shall not be liable for normal manufacturing defects or customary variances from specifications.

Special Conditions

Products sold by Curious Audio LLC are not designed, intended, or authorized for use in applications where the failure of the product could create a situation where catastrophic property damage, personal injury or death may occur. In the event that the Customer purchases or uses any Curious Audio LLC products for any such unintended or unauthorized application, the Customer shall indemnify and hold harmless Curious Audio LLC and its officers, directors, employees, agents, affiliates, successors and assigns against all claims, costs, damages and expenses (including reasonable attorneys' and expert witness' fees) arising out of or in connection with, directly or indirectly, any claim for property damage, personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Curious Audio LLC was negligent regarding the design or manufacture of the subject product.

WARNING: Any attempt by the Customer to modify or repair the internal circuitry of this product will void this warranty. Furthermore, potentially lethal voltages can be present inside the amplifier even when it is off and unplugged. Should repairs be necessary, the Customer is strongly encouraged to contact the Authorized Distributor in their territory.

North & South America
Curious Audio LLC
200 E. Main Street
Newburgh, IN 47630
USA

p: (+1) 828-708-7025
w: curiousaudio.us
e: info@curiousaudio.us

CURIOUS AUDIO LLC • CURIOUSAUDIO.US

AUDITY ONE

RECORDING AMPLIFIER


MADE IN USA

Owner's Manual



Overview of the Audity One

od FRONT PANEL, L-R

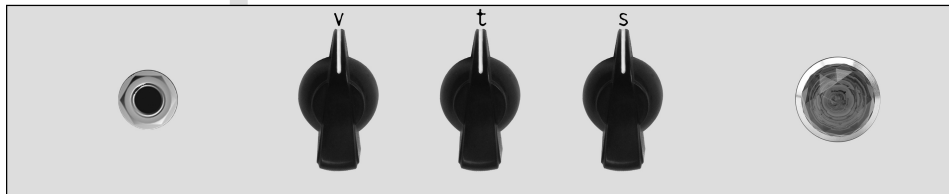

Input Jack: Accepts any unbalanced instrument source.

Overdrive (od): Extra gain stage. Push knob down to bypass. When engaged, this knob works like a master volume knob.


Volume (v): Output level with overdrive bypassed / gain adjust in overdrive mode.

Tone (t): High frequency cut. Pull knob out to bypass.

Speed (s): Adjusts the speed of the tremolo effect.

Lamp & Jewel: 6.3v miniature light bulb (model #47) and jewel cover.

LEFT SIDE PANEL, L-R

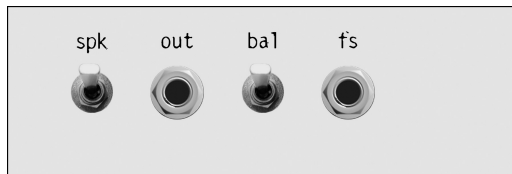


Speaker Switch: Turns speaker off for silent line out operation.

Line Out: Balanced +4dBu line out, also accepts headphones.

Bal/Unbal Switch: Select balanced or unbalanced operation for the Line Out jack. The line out is balanced when this switch is in the up position.

Footswitch: Footswitch jack to switch on/off tremolo effect.

RIGHT SIDE PANEL, L-R

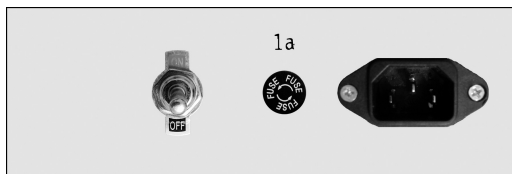


Power Switch: Turns the amplifier on and off.

Fuse Assembly: 1A (120v), or 1/2A (240v) Slo-Blo 250vac 3AG fuse.

IEC Connector: Has built-in EMI/RF filtering. Accepts IEC power cord, recommended no smaller gauge than 18AWG.

TUBES/VALVES

We encourage you to experiment with different vacuum tubes to enjoy the full range of tonal versatility of the Audity One.

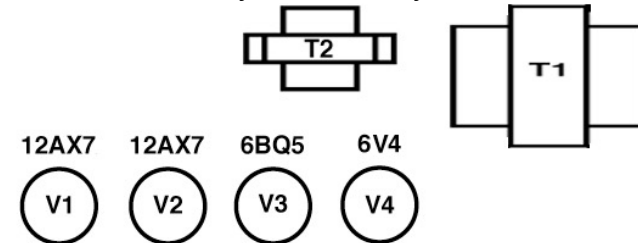

V1 - Preamp: Accepts 12AX7 / 7025, or these other similar noval B9A pinout tubes (from low to high gain): 12AU7, 12BH7, 12DW7, 12AY7, 6072, 12AT7, 6201, 12AZ7, 5751, 12AD7, & 12BZ7.

V2 - Tremolo/MV: 12AX7 / 7025 tube. Only sub with exact equivalent types. Controls the Master Volume channel and tremolo effect.

V3 - Power Amp: 6BQ5 / EL84, 8BQ5 / XL84, or 7189 tube. A 6BQ5 will be brighter and more aggressive; a 7189 similar to that but with more headroom, an 8BQ5 will have a darker and cleaner tone.

V4 - Rectifier: 6V4 / EZ80 or 6CA4 / EZ81. Neither tube will have any noticeable effect on amplifier tone.

WARNING: VACUUM TUBES GET HOT, DO NOT TOUCH WHEN AMP IS ON

HANDY FOOTSWITCH™

Included with your Audity One is the Handy Footswitch™, which is a 1/4" phono plug wired to engage the tremolo effect when it is inserted into the footswitch ("fs") jack.

AUDITY ONE ACCESSORIES

Footswitch: Fifteen foot corded footswitch for tremolo control.

Tube Shields: These protective shields attach to Audity one bayonet tube sockets. Available in normal and tall sizes.

Handy Footswitch™: Get a replacement or grab one for another amp.

Find these items and more at curiousaudio.us